



Ladder-Free Solutions™

Snow Roof Rake


10-Piece Pole Extension



Model **SR3616-1**

User Guide


What's Included

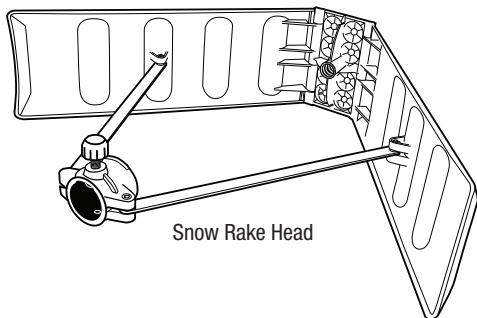

Top Pole




Extension Pole(s)



End Pole



Nylon Strap

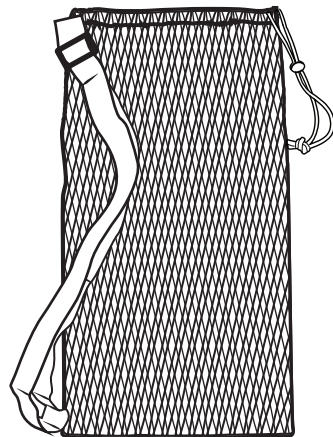


Storage Bag with Drawstring & Strap


Assembly

Roof Rake Head Unit


- 1** Slide **TOP pole** through the pole insert on head unit.

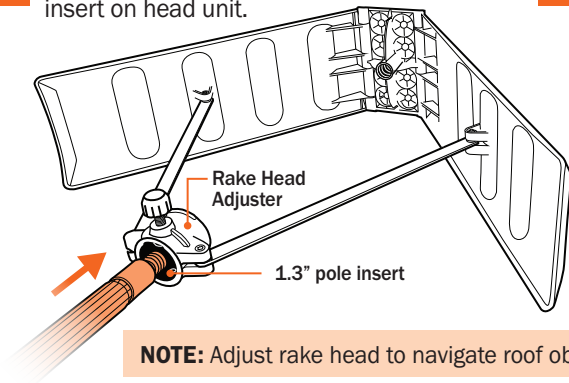

- 2** While keeping the holes aligned, insert **TOP pole** into head unit.



- 3** Turn **TOP pole** **CLOCKWISE** to secure.

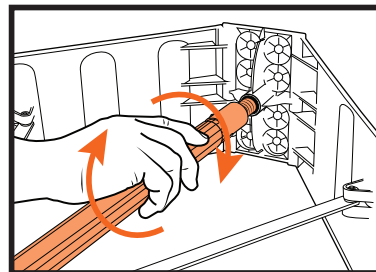


NOTE: Adjust rake head to navigate roof obstacles such as roof vents, pipe jacks, turtle vents and valleys.

EZsmartTools.com


Assembly

Roof Rake Head Unit

- 4** Slide Rake head adjuster to desired roof rake position.

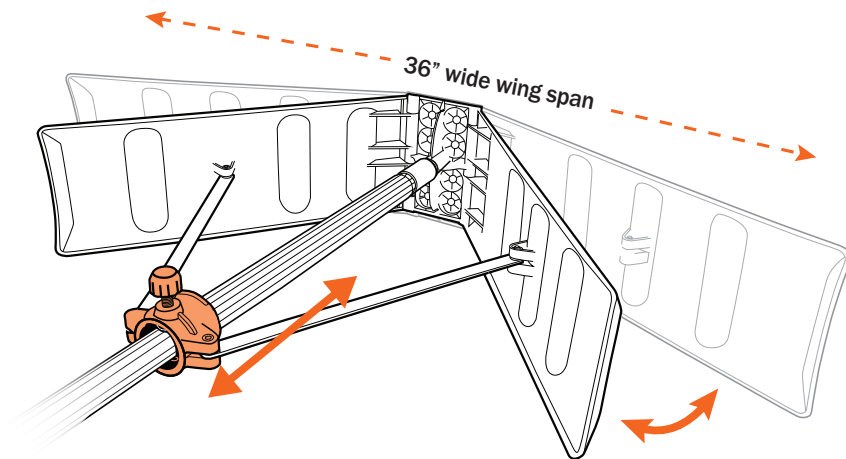


- 5** Hand-tighten* Rake head adjuster knob to secure rake position.

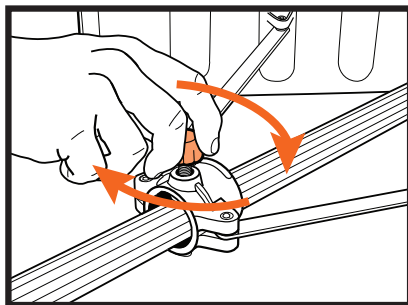


DO NOT USE PLIERS OR
OVER-TIGHTEN THE
RAKE HEAD ADJUSTER

Attaching An Extension Pole


- 1** Press **DOWN** on snap pin and insert into larger end of pole.

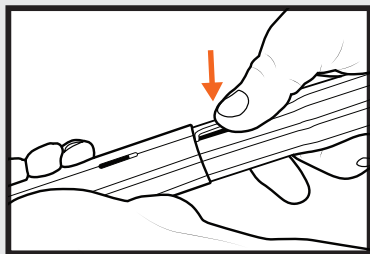

- 2** Align top section of poles until **snap pin engages** in hole.

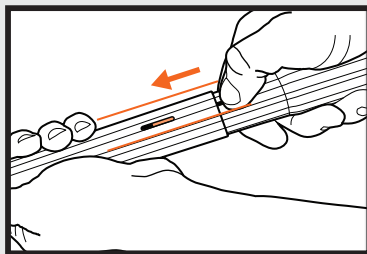

- 3** Continue pushing until **snap pin locks** into place.

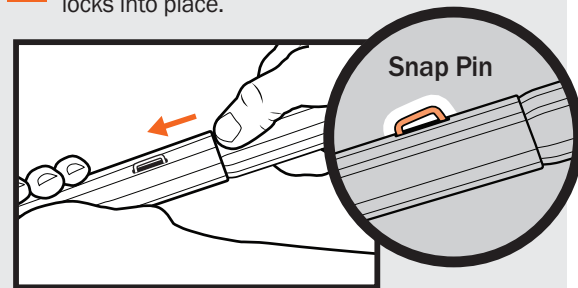

**To disassemble, push snap pin down & pull.*

Pole/Extensions Assembly **16 feet (21 feet reach)**



Operation Snow Removal Tips

What You'll Need:

- EZ Smart snow roof rake (has non-abrasive blade to protect shingles)
- Non-slip boots and winter gloves (not included)
- Eye protection (not included), since snow chunks can fall suddenly

Step-by-Step Instructions:

1 Wait for the Right Conditions

- Only rake fresh or soft snow if possible. Hardened snow or ice is more difficult and dangerous to remove.
- Avoid raking in high winds or during icy rain.
- Make sure visibility is good.

2 Stand on Solid, Safe Ground

- Stay on the ground whenever possible.
- Do not climb on the roof, may damage shingles.
- Clear a safe working area around the home. Watch for icy patches, buried obstacles, or uneven ground.

3 Start from the Edge of the Roof

- Begin at the roof's edge (eaves/gutters) and work your way upward, pulling snow downward toward you.
- Do not push snow up the roof — this can damage shingles.

TIP: Remove snow in small sections (1-2 foot increments) rather than large swaths to maintain control.

Operation Snow Removal Tips

4 Use Smooth, Controlled Pulls

- Use slow, steady movements. Avoid jerking or yanking the rake, this can damage shingles.
- Let gravity help. The snow should fall naturally with each pull.

BE CAREFUL: Don't stand directly under the area you're raking, snow or ice chunks can fall suddenly.

5 Avoid Key Roof Features

These areas can be damaged easily or catch your rake. Stay clear of the following: ***Skylights, Roof vents, Solar panels, Chimneys***

6 Don't Try to Clear It All

- You don't need to remove every bit of snow, just enough to reduce load and prevent ice dams.
- A general guideline: remove about 6-8+ feet (or more with heavy snow falls) up from the eaves.

7 Take Breaks & Stay Safe

- Snow raking is physical work, take breaks to avoid fatigue.
- If you feel strain or your pole is iced over, stop and reassess.


SAFETY TIPS

USE A ROOF RAKE PROACTIVELY AFTER EVERY HEAVY SNOWFALL (6 inches or more) to prevent buildup rather than waiting until problems arise.



- Be aware of overhead power lines.
- Never use metal tools that can damage your roof or conduct electricity.
- Don't use a ladder unless absolutely necessary and you have someone to stabilize it.
- If snow is hard-packed or there's ice buildup, consider hiring a professional instead of forcing it.

 **CAUTION: KEEP AWAY FROM ELECTRICAL WIRES**

Convenient Compact Storage

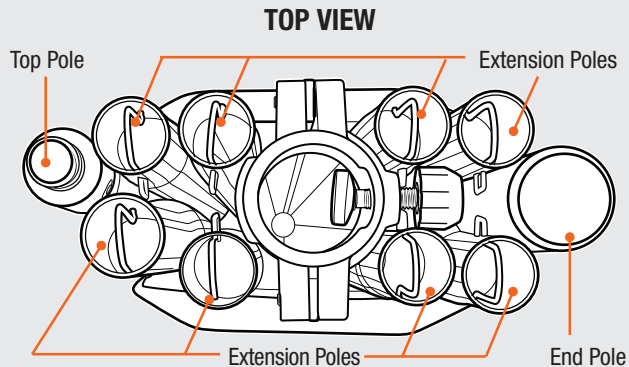


- 1** Fold roof rake head, then place down with rake adjuster facing up.
- 2** Place extension poles on the circular receptacles on the roof rake head.
- 3** Use hook & loop strap to secure poles and folded rake head unit.
- 4** Place inside mesh carry bag and pull drawstring to close.

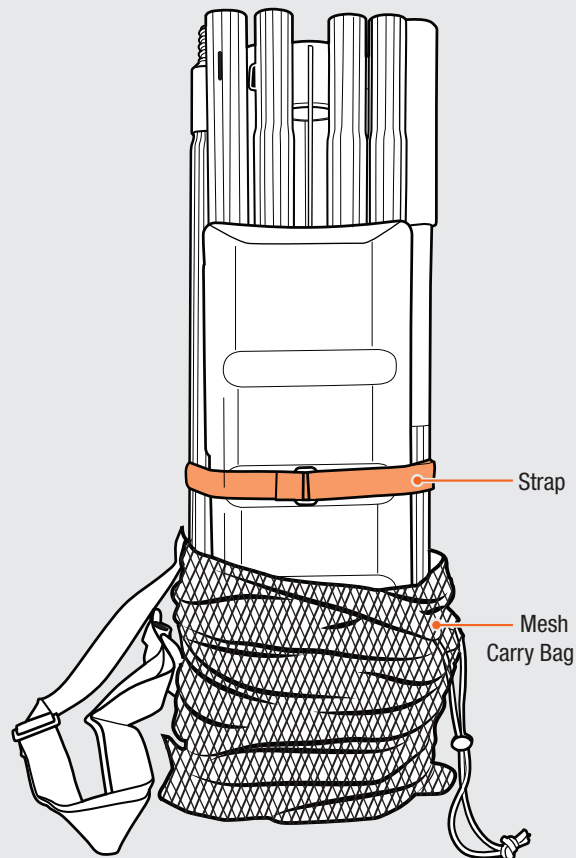



Ladder-Free Solutions™

Reach up to 30ft with additional **ADD-A-POLES** (sold separately)



Extension poles
work with standard
Acme thread products



SCAN FOR MORE INFO



Distributed by EZ Smart Co. Omaha, NE
MADE IN CHINA

2 YEAR
Warranty

EZsmartTools.com



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov